WALL-MOUNT UTILITY CABINET
ASSEMBLY INSTRUCTIONS

HANGING ANGLE MUST BE SUPPORTED WITH 1/2" - 13 TPI GRADE 5 (MINIMUM) ALL-THREAD. SANDWICH HANGING ANGLES AND CEILING ANCHOR POINTS WITH 1/2" GRADE 5 (MINIMUM) STEEL FLAT WASHERS AND 1/2" - 13 TPI GRADE 5 (MINIMUM) HEX NUTS AS SHOWN. MUST USE DOUBLED HEX NUT CONFIGURATION BENEATH UTILITY CABINET HANGING ANGLES AND ABOVE CEILING ANCHORS. MAINTAIN 1/4" OF EXPOSED THREADS BENEATH BOTTOM HEX NUT. TORQUE ALL HEX NUTS TO 57 FT-LBS.

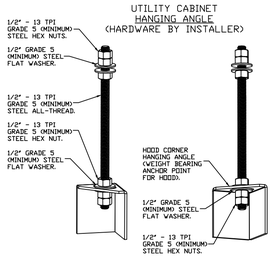




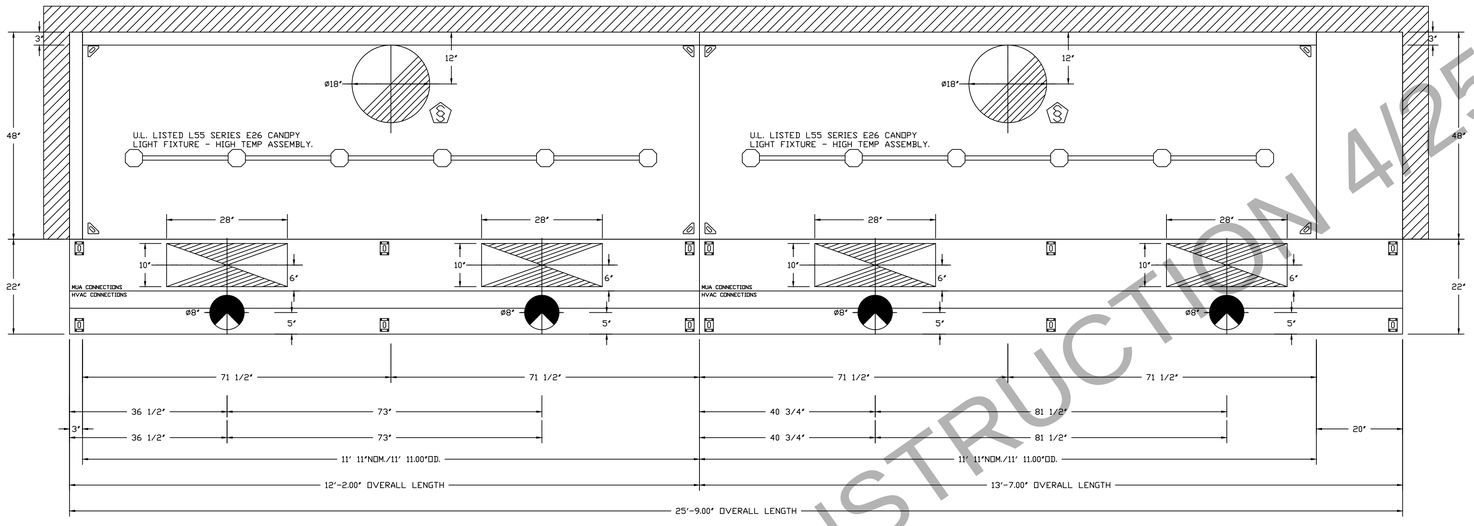


PLAN VIEW - HOOD #1
11' 11.00" LONG 4824ND-2-ACPSP-F

ACPSP SHIPS LOOSE FOR FIELD INSTALLATION

PLAN VIEW - HOOD #2
11' 11.00" LONG 4824ND-2-ACPSP-F

ACPSP SHIPS LOOSE FOR FIELD INSTALLATION

CAPTIVE-AIRE HOODS ARE BUILT IN COMPLIANCE WITH UL 710 AND NFPA 96 AND ARE RECOGNIZED BY ONE OR MORE OF THE FOLLOWING:

ETL SANITATION LISTED

ETL LISTED
FILE# 102900319PRT-001

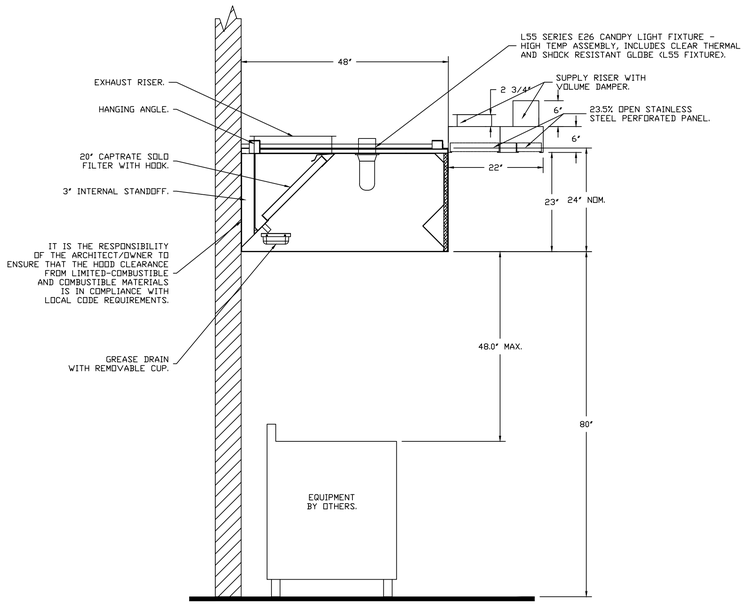


*SECTION VIEW - MODEL 4824ND-2-ACPSP-F*
*HOOD - #1*

NOTE: UNLESS OTHERWISE STATED, PANDA RESTAURANT GROUP SHALL PROVIDE ALL EQUIPMENT ON THE FOLLOWING CAPTIVEAIRE SHEETS, INCLUDING: HOODS, FIRE SYTEM, EXHAUST FANS, SUPPLY FAN, BATHROOM FAN AND ELECTRICAL INTERLOCK PACKAGE

DOUBLE WALL DUCT BY MECHANICAL
PLEASE USE CONTACT BELOW FOR PRICING

ANSUL GAS VALVE:

THE ANSUL GAS VALVE IS PROVIDED BY CAPTIVEAIRE SYSTEMS. CONTACT OUR OFFICE WITH THE VALVE SIZE 3 DAYS IN ADVANCE OF WHEN IT IS NEEDED ON SITE.

FOR QUESTIONS CALL THE
CAPTIVEAIRE
SOUTHERN CALIFORNIA OFFICE

3002 DOW AVENUE, SUITE 410
TUSTIN, CA 92780
TEL: 714-957-1500 EMAIL: REG86@CAPTIVEAIRE.COM

ISSUED FOR BID - NOT FOR CONSTRUCTION 4/25/22

**REVISIONS**

| | DESCRIPTION | DATE: |
|---|---|---|
| 1 | | |
| 2 | | |
| 3 | | |
| 4 | | |

CAPTIVE-AIRE

www.captiveaire.com
Southern California Office
3002 Dow Ave - Suite 410, Tustin, CA, 92780 PHONE: (714) 957-1500 FAX: (919) 227-5979 EMAIL: rep86@captiveaire.com

Panda Express - Concord NC (D8698)
CONCORD, NC, 28027

**DATE:** 2/23/2022

**DWG.#:** 5343821

**DRAWN BY:** AH-86

**SCALE:** 3/4" = 1'-0"

**MASTER DRAWING**

**SHEET NO.** 2

PANDA EXPRESS CHINESE KITCHEN

PANDA RESTAURANT GROUP INC.
1683 Walnut Grove Ave.
Rosemead, California
91770
Telephone: 626.799.9898
Facsimile: 626.372.8288

All ideas, designs, arrangement and plans indicated or represented by this drawing are the property of Panda Express Inc. and were created for use on this specific project. None of these ideas, designs, arrangements or plans may be used by or disclosed to any person, firm, or corporation without the written permission of Panda Express Inc.

REVISIONS:

| | |
|---|---|
| | |
| | |
| | |
| | |
| | |
| | |
| | |

ISSUE DATE:

| | |
|---|---|
| 1 | 03.04.2022 ISSUE FOR PERMIT |
| | |
| | |
| | |
| | |
| | |

DRAWN BY: SDT

PANDA PROJECT #: - S8-22-D8698
C&P PROJECT #: - 2210806

CUHACI PETERSON
2600 Maitland Center Parkway
Suite #200
Maitland, FL 32751
P (407) 661-9100
F (407) 661-9101
c-p.com

03.04.2022

NORTH CAROLINA PROFESSIONAL ENGINEER SEAL 048525 JOSE I. DIAZ-VELASQUEZ

PANDA EXPRESS
TRUE WARM AND WELCOME 2200
3030 DERITA ROAD
CONCORD, NC 28027

# M-401

HOOD DETAIL PLAN

TRUE WARM & WELCOME 2200 R4